


STANDARD.
(WITHOUT FOOTPATH)

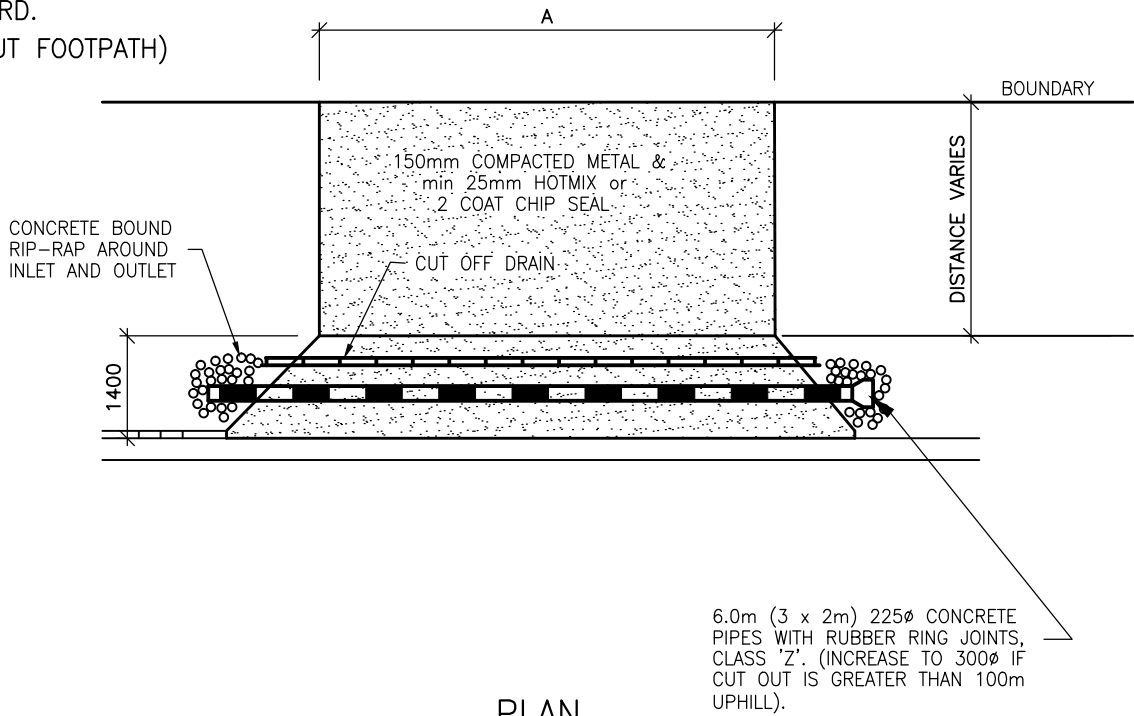

PLAN
N.T.S.

A CUT OFF DRAIN IS REQUIRED ON ALL RURAL DRIVES FALLING TOWARDS ROAD.

25mm HOTMIX OR 2 COAT CHIPSEAL

150mm COMPACTED DEPTH METAL



150mm CONCRETE UNREINFORCED. (BEHIND FOOTPATH IF ONE EXISTS)

BOUNDARY

SECTION
N.T.S.

NOTES

1. Where a concrete footpath exists then the area between the footpath and boundary shall be constructed in concrete.
2. Crossings shall be designed to comply with "Parking and Driveway Guidelines" in relation to grades & visibility provisions.
3. Refer to SD 3.15 for driveway profile limits.
4. Where road is unsealed omit the hotmix or chip seal surface and the cut off drain. Construction must still be such that stormwater is not discharged onto the road.
5. Boxing must be to the full depth of the concrete to be poured.
6. Flares must be external to the crossing.

ENGINEERING
STANDARDS MANUAL

ISSUE
SEPTEMBER 2010

**RESIDENTIAL VEHICLE
CROSSING
(UNKERBED ROADS)**

STANDARD DETAIL

SD 3.12